


MIRROR

MIR 600

INSIDE APPLICATION

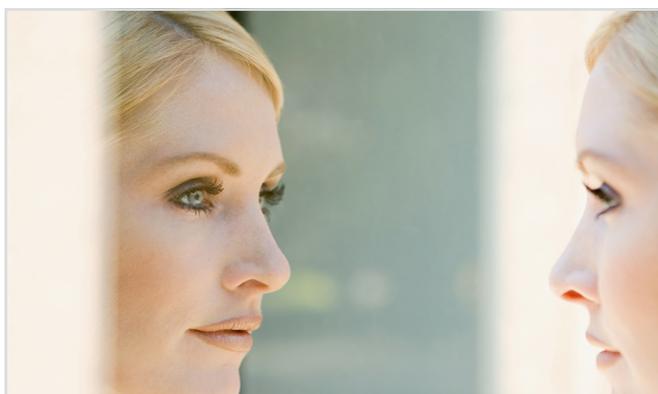

See without being seen

HIGH PERFORMANCE ONE WAY MIRROR

HIGH PERFORMANCE

The mirrored-mirror film preserves your privacy by creating a mirror on one side of your glass and thus allows you to not allow prying eyes inwards. It keeps the passage of natural light to keep a transparency and therefore full visibility on the other side. It is particularly recommended for offices on the ground floor, meeting rooms, etc.



Durability : from 12 to 15 years for vertical application in central Europe.



Use : Réfectiv window films are designed for use on any type of clear normal glass.



Maintenance after 30 days : with usual cleaning solutions (non-abrasive, without ammonia...). Cleaning products that may scratch the film should be avoided.



Storage : 2 years from delivery. This film should be kept away from excessive humidity and sun rays, at temperatures below 38°C.

In order to constantly improve our production we may change a product colour and manufacturing process without prior notice.

INFORMATION

MATERIAL:Crystal pet
ADHESIVE:Acrylic polymer
LINER:Pet 23 microns
THICKNESS:80 microns
APPLICATION SIDE :Inside
THERMAL RESISTANCE:From -20 to 80°C
UVA TRANSMISSION:5%
APPLICATION T° :min, + 5°C
FIRE RATINGS: B-S1, D0
STANDARDS :EUROCLASSES
WARRANTY:5 years*

DIMENSIONS

1,52 x 2,5 m
 1,52 x 5 m
 1,52 x 10 m
 1,52 x 30 m

*for glazing not exposed to the sun

Application's instructions



Application's video



Application Method

The glass surface to be glued on has to be free from dust, grease or other contaminants. Some specific materials such as polycarbonate can cause air bubble problems. Therefore, a compatibility test is recommended. For more precision we recommend to refer back to the application table.

Production and standards

In order to constantly improve our production we may change a product colour and manufacturing process without prior notice. Before applying our products we recommend that our users ensure that the film is suitable for the intended use and comply with current standards.

standKOLOR®